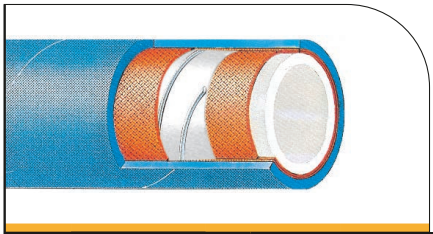

Milk & Vegetable Oil S&D

FSDM871

KREMA SD-10 Serisi / KREMA SD-10 Series

ID		OD	WP		BP		VACUUM	BR/r	W	L
inch	mm	mm	bar	psi	bar	psi	bar	mm	g/m	m
3/4"	19	31	10	145	30	435	-0.92	70	705	40-46-61
1"	25.4	38	10	145	30	435	-0.92	85	955	40-46-61
1 1/4"	32	45	10	145	30	435	-0.92	100	1225	40-46-61
1 1/2"	38	52	10	145	30	435	-0.92	120	1650	40-46-61
1 3/4"	44.5	58.5	10	145	30	435	-0.92	140	1830	40-46-61
2"	50.8	66	10	145	30	435	-0.92	160	2285	40-46-61
2 1/2"	63.5	78.5	10	145	30	435	-0.92	280	2797	40-46-61
3"	76.2	93	10	145	30	435	-0.92	360	3735	40-46-61
4"	101.6	118.5	10	145	30	435	-0.92	450	4725	40-46-61

Arıtma : Maks. 15 dakika boyunca 120 °c. buharlı, maks. 15 dakika boyunca 50 °c. kostik soda (%5) ile.
Sanification : Max. 120 °c for 15 min. with steam, max. 50 °c for 15 min. with caustic soda (5%).
Sterilisierung : Bei max. 120 °c für 15 min. mit dampf, bei max. 50 °c für15 min. mit natronlauge (5%).

TÜP : BEYAZ, ZEHİRSİZ, TAT VE KOKUSUZ, BİTKİSEL YAĞLARA DAYANIKLI, GIDA KALİTESİNDE NBR KAUÇUK.
GÜÇLENDİRME : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL VE ÇELİK TEL HEUX.
KAPAK : YAĞA, HAVA ŞARTLARINA, OZONA VE AŞINMAYA DAYANIKLI, ÖZEL SENTETİK KAUÇUK.
UYGULAMA : SÜT, BİTKİSEL YAĞ VE İÇECEKLERİN EMME VE BOŞALTMA.

TUBE : WHITE, NON-TOXIC, TASTE AND ODOUR FREE, VEGETABLE OIL RESISTANT, FOOD GRADE NBR RUBBER.
REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE AND STEEL WIRE HEUX.
COVER : OIL, WEATHER, OZONE AND ABRASION RESISTANT, SPECIAL SYNTHETIC RUBBER.
APPLICATION : SUCTION AND DISCHARGE OF MILK, VEGETABLE OIL AND BEVERAGES.

SEELE : GESCHMACKS- UND GERUCHSNEUTRAL , LEBENSMITTELECHT, SPEZIELLER SYNTHETISCHER NBR GUMMI, WEISS, SCHADSTOFFFREI, BESTIINDIG GEGEN PFLANZUCHE ÖLE
EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE MIT EINER STAHLDRAHTSPIRALE.
DECKE : ÖL-, OZON- UND WITTERUNGSBESTIINDIGER, ABRIEBSFESTER, SPEZIELLER SYNTHETISCHER GUMML
ANWENDUNG : SAUG-DRUCKSCHLAUCH FÜR MILCH, PFLANZUCHE ÖLE UND GETRIINKE.

-40˚C / + 80˚C
-40˚F / +176˚F

İŞARETLEME / MARKING / BESCHRIFTUNG : TRANSFER TAPE OR EMBOSSED

KREMA SD/10 **MILK & VEGETABLE OIL S/D HOSE - W.P. 10 Bar (145 PSI)**

Normlar **Norms** **Normen**	ISO 1307 MEETS FDA REQUIREMENTS	**Renk** **Colour** **Farben**	