LPGSD 279/27S

LPG S&D-Ω

EN 1762

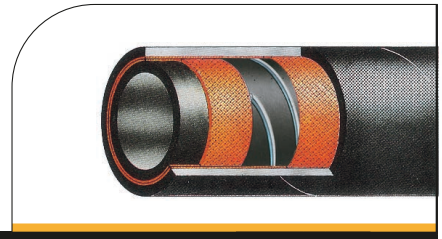

ID		OD	WP		BP		VACUUM	BR/r	W	L
inch	mm	mm	bar	psi	bar	psi	bar	mm	g/m	m
1/2"	12.7	23	25	363	100	1450	-0.80	90	441	40-46-61
5/8"	16	26	25	363	100	1450	-0.80	95	519	40-46-61
3/4"	19	31	25	363	100	1450	-0.80	100	681	40-46-61
1"	25.4	38	25	363	100	1450	-0.80	150	902	40-46-61
1 1/4"	32	45	25	363	100	1450	-0.80	200	1174	40-46-61
1 1/2"	38	52	25	363	100	1450	-0.80	280	1504	40-46-61
2"	50.8	67	25	363	100	1450	-0.80	350	2196	40-46-61
2 1/2"	63.5	81	25	363	100	1450	-0.80	480	2909	40-46-61
3"	76.2	94	25	363	100	1450	-0.80	550	3577	40-46-61
4"	101.6	120	25	363	100	1450	-0.80	720	4557	40-46-61

TÜP : LPG DAYANIMLI, İLETKEN, SİYAH NBR KAUÇUK.
GÜÇLENDİRME : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL, PASLANMAZ ÇELİK HELEZON.
KAPAK : OZONA, HAVA ŞARTLARINA, ISIYA, ALEV VE YAĞA DAYANIKLI, ÖZEL PİM DELİKLİ SENTETİK KAUÇUK
UYGULAMA : LPG EMME VE TAŞIMA İÇİN.

TUBE : LPG RESISTANT, CONDUCTIVE, BLACK NBR RUBBER.
REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE, STAINLESS STEEL WIRE HELIX.
COVER : OZONE, WEATHER, HEAT, FLAME AND OIL RESISTANT, SPECIAL PIN-PRICKED SYNTHETIC RUBBER
APPLICATION : FOR SUCTION AND DELIVERY OF LPG.

SEELE : LPG-BESTANDIG, NITRIL-GUMMI SCHWARZ, ISOLIEREND.
EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE UNO ROSTFREIEM STAHLDRAHT.
DECKE : ABRIEBFEST, OZON, WETTER, HITZE,UND ÖLBESTANDIG, FLAMMWIDRIGER, GEPRICKTER, SPEZIELLER SYNTHETIKGUMML
ANWENDUNG : LPG FÜLLSYSTEME, S&D.

CODE 279 : TYPE SD: -30˚C /+ 70˚C (-22˚F / + 158˚F)
CODE 27S : TYPE SD-LTS: -50˚C /+70˚C (-58˚F / + 158˚F)

İŞARETLEME / MARKING / BESCHRIFTUNG : TRANSFER TAPE OR EMBOSSED

LPG / SD — **LPG HOSE - TS EN 1762 TYPE SD - Ω W.P. 25 BAR (363 PSI)**

LPG / SD - LTS — **LPG HOSE - TS EN 1762 TYPE SD - LTS - Ω W.P. 25 BAR (363 PSI)**

Normlar Norms Normen	TS EN 1762 TYPE : SD TS EN 1762 TYPE : SD - LTS	**Renk Colour Farben**	