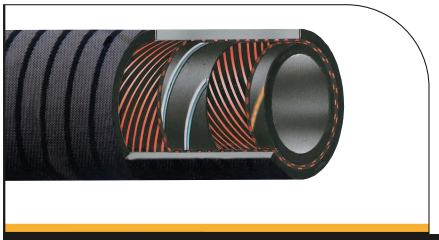

Oil S&D 10 Bar

CHANNELED

OGR456

YAKIT GR Serisi / YAKIT GR Series

ID		OD	WP		BP		VACUUM	BR/r	W	L
inch	mm	mm	bar	psi	bar	psi	bar	mm	g/m	m
3/4"	19	29	10	145	30	435	-0.92	50	494	40-46-61
1"	25.4	35	10	145	30	435	-0.92	70	601	40-46-61
1 1/4"	32	42	10	145	30	435	-0.92	90	814	40-46-61
1 1/2"	38	48	10	145	30	435	-0.92	105	948	40-46-61
2"	50.8	63	10	145	30	435	-0.92	150	1584	40-46-61
2 1/2"	63.5	74	10	145	30	435	-0.92	185	1786	40-46-61
3"	76.2	90	10	145	30	435	-0.92	220	2570	40-46-61
4"	101.6	117.5	10	145	30	435	-0.92	300	4234	40-46-61
5"	127	146	10	145	30	435	-0.80	400	6018	40-46-61
6"	152.4	172	10	145	30	435	-0.80	550	7063	40-46-61

SEÇENEKLER / OPTIONS / OPTIONEN

Talep Üzerine Tüp : İletken (Ω)
Tube Upon Request : Conductive (Ω)
Seele Nach Anfrage : Leitfahig (Ω)

TÜP : YAĞ VE BENZİNE DAYANIKLI SİYAH NBR.
GÜÇLENDİRME : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL, ÇELİK TEL HEUX VE ANTİSTATİK BAKIR TEL.
KAPAK : YAĞ, HAVA ŞARTLARI, OZON, AŞINMA VE DENİZ SUYUNA DAYANIKLI, KANALLI, ÖZEL SENTETİK KAUÇUK
UYGULAMA : %50'YE KADAR AROMATİK İÇERİĞİ OLAN PETROL ÜRÜNLERİNİN EMME VE TAHLİYESİ İÇİN.

TUBE : OIL AND PETROL RESISTANT BLACK NBR.
REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE,STEEL WIRE HEUX AND ANTISTATIC COPPER WIRE.
COVER : OIL, WEATHER, OZONE, ABRASION AND SEA WATER RESISTANT, CHANNELED , SPECIAL SYNTHETIC RUBBER
APPLICATION : FOR SUCTION AND DISCHARGE OF PETROLEUM PRODUCTS WITH AROMATIC CONTENT UP TO 50%.

SEELE : ÖL- UNO KRAFTSTOFFBESTANDIG, NITRILGUMMI, SCHWARZ.
EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE, STAHLDRAHTSPIRALE UNO ANTISTATISCHER KUPFERUTZE.
DECKE : ÖL, OZON - UND WITTERUNGSBEST ANDIG, ABRIEBFEST, SPEZIELL SYNTHETISCHER GUMMI, KORDELGERIPPT, GEEIGNET FÜR EINSATZ IM SALZHALTIGEN WASSER.
ANWENDUNG : SAUG UNO DRUCKSCHLAUCH FÜR MINERALÖLPRODUKTE MIT MAX. 50 % AROMATENGEHALT.

-30˚C / + 70˚C
-22˚F / +158˚F

İŞARETLEME / MARKING / BESCHRIFTUNG : **TRANSFER TAPE OR EMBOSSED**

YAKIT GR / 10 OIL S / D HOSE - W.P. 10 Bar (145 PSI)

Normlar Norms Normen	ISO 1307	Renk Colour Farben	