KREMA D-10 Serisi / KREMA D-10 Series

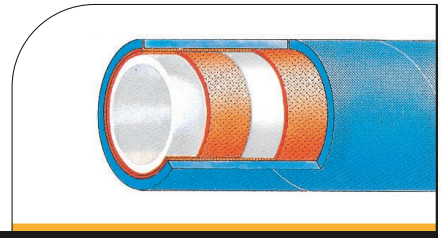

FDM861 Milk & Vegetable Oil Delivery

ID		OD	WP		BP		W	L
inch	mm	mm	bar	psi	bar	psi	g/m	m
3/4"	19	30	10	145	30	435	613	40-46-61
1"	25.4	37	10	145	30	435	793	40-46-61
1 1/4"	32	44	10	145	30	435	1048	40-46-61
1 1/2"	38	51	10	145	30	435	1314	40-46-61
1 3/4"	44.5	57.5	10	145	30	435	1507	40-46-61
2"	50.8	65	10	145	30	435	1835	40-46-61
2 1/2"	63.5	77.5	10	145	30	435	2269	40-46-61
3"	76.2	92	10	145	30	435	2928	40-46-61
4"	101.6	117.5	10	145	30	435	3825	40-46-61

Arıtma : Maks. 15 dakika boyunca 120 °c. buharlı, maks. 15 dakika boyunca 50 °c. kostik soda (%5) ile.
Sanification : Max. 120 °c for 15 min. with steam, max. 50 °c for 15 min. with caustic soda (5%).
Sterilisierung : Bei max. 120 °c für 15 min. mit dampf, bei max. 50 °c für15 min. mit natronlauge (5%).

TÜP : BEYAZ, ZEHİRSİZ, TAT VE KOKUSUZ, BİTKİSEL YAĞLARA DAYANIKLI, GIDA KALİTESİNDE NBR KAUÇUK.
GÜÇLENDİRME : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL .
KAPAK : YAĞA, HAVA ŞARTLARINA, OZONA VE AŞINMAYA DAYANIKLI, ÖZEL SENTETİK KAUÇUK
UYGULAMA : SÜT, BİTKİSEL YAĞ VE İÇECEKLERİN BOŞALTILMASI İÇİN.

TUBE : WHITE, NON-TOXIC, TASTE AND ODOUR FREE, VEGETABLE OIL RESISTANT, FOOD GRADE NBR RUBBER.
REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE .
COVER : OIL, WEATHER, OZONE AND ABRASION RESISTANT, SPECIAL SYNTHETIC RUBBER
APPLICATION : FOR DISCHARGE OF MILK, VEGETABLE OIL AND BEVERAGES.

SEELE : GESCHMACKS- UND GERUCHSNEUTRAL , LEBENSMITTELECHT, SPEZIELLER SYNTHETISCHER NBR GUMMI, WEISS, SCHADSTOFFFREI, BESTANDIG GEGEN PFLANZUCHE ÖLE
EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE MIT EINER STAHLDRAHTSPIRALE.
DECKE : ÖL-, OZON- UND WITTERUNGSBESTANDIGER, ABRIEBSFESTER, SPEZIELLER SYNTHETISCHER GUMML
ANWENDUNG : SAUG-DRUCKSCHLAUCH FÜR MILCHSAMMELWAGEN UND MILCHSILOS.

-40˚C / + 80˚C
-40˚F / +176˚F

İŞARETLEME / MARKING / BESCHRIFTUNG : TRANSFER TAPE OR EMBOSSED

KREMA D/10 **MILK & VEGETABLE OIL DELIVERY HOSE - W.P. 10 Bar (145 PSI)**

Normlar Norms Normen	ISO 1307 MEETS FDA REQUIREMENTS	**Renk Colour Farben**	