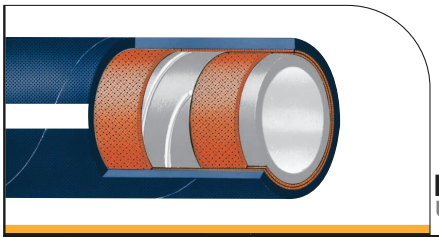

Hard Wall Chemical Suction & Delivery
UHMW-PE

RS610

OSRIS-PE Serisi / OSRIS-PE Series

ID		OD	WP		BP		VACUUM	BR/r	W	L
inch	mm	mm	bar	psi	bar	psi	bar	mm	g/m	m
3	76	92	16	232	64	928	-0.80	530	3200	max. 61
4	102	121	16	232	64	928	-0.80	700	4750	max. 61

TÜP : ÇEŞİTLİ AŞINDIRICI KİMYASALLAR VE ÇÖZÜCÜLER İÇİN UYGUN YARI ŞEFFAF, GIDA SINIFINDA UHMW-PE ASTAR.
GÜÇLENDİRME : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL, 2 ÇELİK TEL HELEKS VE ANTİSTATİK BAKIR TEL.
KAPAK : DENİZ SUYUNA, HAVA ŞARTLARINA, OZONA, AŞINMAYA DAYANIKLI MAVİ, EPDM KAUÇUK.
UYGULAMA : TÜM AŞINDIRICI KİMYASALLARIN, ÇÖZÜCÜLERİN EMME VE BOŞALTMALARI İÇİN (SEL KİMYASAL DİRENÇ ÇİZELGESİNE BAKIN).

TUBE : TRANSLUCENT, FOOD GRADE UHMW-PE LINER SUITABLE FOR WIDE RANGE OF CORROSIVE CHEMICALS AND SOLVENTS.
REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE, 2 STEEL WIRE HELIX AND ANTISTATIC COPPER WIRE.
COVER : SEA WATER, WEATHER,OZONE, ABRASION RESISTANT BLUE, EPDM RUBBER.
APPLICATION : FOR SUCTION AND DISCHARGE OF ALL CORROSIVE CHEMICALS, SOLVENTS (SEE SEL CHEMICAL RESISTANCE CHART).

SEELE : GEGEN KORROSIVE CHEMIKALIEN UND LÖSUNGSMITTEL BESTANDIGER, TRANSPARENTER, LEBENSMITTELECHTER UHMW-PE INLINER.
EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE MIT 2 STAHLDRAHTSPIRALE UND ANTISTATISCHE KUPFERLITZE.
DECKE : OZON, MEERWASSER UND WITTERUNGSBESTANDIGER, ABRIEBSFESTER EPDM GUMMI, BLAU.
ANWENDUNG : SAUG - DRUCKSCHLAUCH GEEIGNET FÜR ALLE KORROSIVE CHEMIKALIEN, HOCHAROMATISCHE LÖSUNGSMITTEL (SIEHE SEL BESTANDIGKEITSLISTE)

-30˚C / + 70˚C
-22˚F / +158˚F

İŞARETLEME / MARKING / BESCHRIFTUNG : TRANSFER TAPE OR EMBOSSED

OSRIS - PE RS 610 UHMWPE CHEMICAL S/D W.P. ** BAR - (month/year)

Normlar Norms Normen	ISO 1307	Renk Colour Farben	