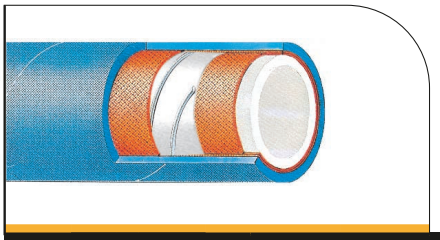

Potable Water S&D

FSDPW821

SPRING SD-10 Serisi / SPRING SD-10 Series

ID		OD	WP		BP		VACUUM	BR/r	W	L
inch	mm	mm	bar	psi	bar	psi	bar	mm	g/m	m
3/4"	19	31	10	145	30	435	-0.92	60	730	40-46-61
1"	25.4	38	10	145	30	435	-0.92	80	984	40-46-61
1 1/4"	32	45	10	145	30	435	-0.92	100	1260	40-46-61
1 1/2"	38	52	10	145	30	435	-0.92	120	1690	40-46-61
1 3/4"	44.5	58.5	10	145	30	435	-0.92	145	1870	40-46-61
2"	50.8	66	10	145	30	435	-0.92	165	2335	40-46-61
2 1/2"	63.5	78.5	10	145	30	435	-0.92	250	2860	40-46-61
3"	76.2	93	10	145	30	435	-0.92	380	3805	40-46-61
4"	101.6	118.5	10	145	30	435	-0.92	500	4835	40-46-61

Arıtma : Maks. 15 dakika boyunca 120 °c. buharlı, maks. 15 dakika boyunca 50 °c. kostik soda (%5) ile.
Sanification : Max. 120 °c for 15 min. with steam, max. 50 °c for 15 min. with caustic soda (5%).
Sterilisierung : Bei max. 120 °c für 15 min. mit dampf, bei max. 50 °c für15 min. mit natronlauge (5%).

TÜP : BEYAZ, TOKSİK OLMAYAN, GIDA KALİTESİNDE, TAT VE KOKUSUZ, ÖZEL SENTETİK KAUÇUK.
GÜÇLENDİRME : YÜKSEK MUKAVEMETLİ SENTETİK TEKSTİL VE ÇELİK TEL HELEZON.
KAPAK : HAVA ŞARTLARINA, OZONA VE AŞINMAYA DAYANIKLI, ÖZEL SENTETİK KAUÇUK.
UYGULAMA : İÇME SUYUNU EMME VE BOŞALTMA İÇİN.

TUBE : WHITE, NON-TOXIC, FOOD QUALITY, TASTE AND ODOUR FREE, SPECIAL SYNTHETIC RUBBER.
REINFORCEMENT : HIGH TENSILE SYNTHETIC TEXTILE AND STEEL WIRE HELIX.
COVER : WEATHER, OZONE AND ABRASION RESISTANT, SPECIAL SYNTHETIC RUBBER.
APPLICATION : FOR SUCTION AND DISCHARGE OF POTABLE WATER.

SEELE : GESCHMACKS- UND GERUCHSNEUTRAL, LEBENSMITTELECHT, SPEZIELLER SYNTHETISCHER GUMMI, WEISS, SCHADSTOFFFREI.
EINLAGE : HOCHZUGFESTE SYNTHETISCHE TEXTILEINLAGE MIT EINER STAHLDRAHTSPIRALE.
DECKE : OZON-UNO WITTERUNGSBESTANDIGER, ABRIEBSFESTER, SPEZIELLER SYNTHETISCHER GUMMI.
ANWENDUNG : FÜR TRINKWASSER GEEIGNETER SAUG- UND DRUCKSCHLAUCH.

-40˚C / + 70˚C
-40˚F / +158˚F

İŞARETLEME / MARKING / BESCHRIFTUNG : TRANSFER TAPE OR EMBOSSED

SPRING SD/10 **POTABLE WATER S/D HOSE - W.P. 10 Bar (145 PSI)**

Normlar **Norms** **Normen**	ISO 1307 MEETS FDA REQUIREMENTS	**Renk** **Colour** **Farben**	